




**Brand: BendPak**  
**Models: XP-10C / XP-10CX**  
**Description: Clearfloor Two-Post Lifts**

- 10,000-pound lifting capacity
- Wide or narrow configuration
- Single piece columns
- Single point safety release
- Dual hydraulic "Direct-Drive" cylinders
- Electric/hydraulic power system
- Large, 19" x 17" steel base plates
- Self-lubricating dura-glide polyethylene bearing system
- Safety locks in each column spaced every 3-inches
- Automatic arm restraints
- Heavy-duty dual 3/8" equalizer cables with oversize sheaves
- Padded overhead safety-shutoff bar
- Truck and van adapters standard

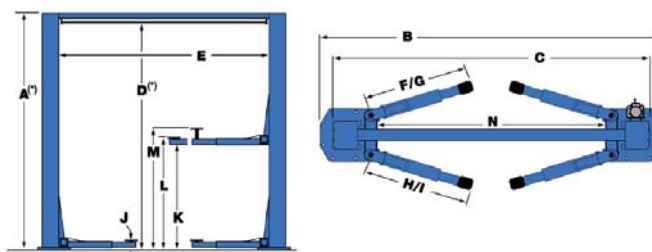

MODEL	XP-10C	XP-10CX
Lifting Capacity*	10,000 Lbs. / 4536 Kg.	10,000 Lbs. / 4536 Kg.
*Max Capacity / Front Axle	5,000 Lbs. / 2268 Kg.	5,000 Lbs. / 2268 Kg.
*Max Capacity / Rear Axle	5,000 Lbs. / 2268 Kg.	5,000 Lbs. / 2268 Kg.
<b>A</b> - Height Overall: (*)	145" / 3683 mm.	145" / 3683 mm.
<b>B</b> - Width Overall (Outside of Base Plate):	132" / 3353 mm.	145" / 3683 mm.
<b>C</b> - Width (Outside of Columns):	124" / 3150 mm.	137" / 3480 mm.
<b>D</b> - Floor To Overhead Switch: (*)	141" / 3581 mm.	141" / 3581 mm.
<b>E</b> - Inside Columns:	102" / 2791 mm.	115" / 2921 mm.
<b>F</b> - Reach (Front Arm Min.):	32" / 813 mm.	35" / 889 mm.
<b>G</b> - Reach (Front Arm Max.):	47" / 1194 mm.	52" / 1321 mm.
<b>H</b> - Reach (Rear Arm Min.):	35" / 889 mm.	35" / 889 mm.
<b>I</b> - Reach (Rear Arm Max.):	52" / 1321 mm.	52" / 1321 mm.
<b>J</b> - Min. Pad Height:	4" / 102 mm.	4" / 102 mm.
<b>K</b> - Rise:	69" / 1753 mm.	69" / 1753 mm.
<b>L</b> - Max Lift Height (Pad Only):	73" / 1854 mm.	73" / 1854 mm.
<b>M</b> - Max Lift Height (6" Adapter):	79" / 2007 mm.	79" / 2007 mm.
<b>N</b> - Drive-Thru Clearance:	93" / 2362 mm.	106" / 2692 mm.
Motor (**)	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.
Time of full Rise:	45 Seconds	45 Seconds
Max Load Per Arm:	2,500 Lbs. / 1134 Kg.	2,500 Lbs. / 1134 Kg.

\* An optional bolt-on top extension for columns raises the overhead bar an additional 24". Must be ordered from factory at time of order.

\*\* Special Voltages Available Upon Request.

The design, material and specifications are subject to change without notice.