

# HD-7W

## Four-Post Lifts

SKU# 5175120

7,000-lb. Capacity, Standard Width, High Lift, Wide Car Lift

Questions? Contact BendPak's Sales Team

sales@bendpak.com | 1-800-253-2363

Monday - Friday, 7AM to 4:30PM PST

## You Save Space with HD-7 Four-Post Lifts

An HD-7 Series [four-post lift](#) has a 7,000-lb. lift capacity and comes in narrow or wide configuration. This lets your garage accommodate a lift structure in virtually any space you can park a car. This car lift offers compact convenience and is perfect in more spacious garages to help maintain an open, fresh appearance.

The HD-7 car lift comes in two space-saving configurations. The perfect service lift for shops or garages with limited floor space, the HD-7 does not require a special foundation or complicated installation procedure. Each lift is about the size of a typical parking space and fits nicely as a residential or commercial parking lift. The applications are endless, but what else would you expect from BendPak? After being in this business for over 50 years, our reputation is as solid as our lifts. If you've ever owned a BendPak four-post lift, you know that means a lot.



## Choose Narrow Width

SKU#	Model	Description
5175510	HD-7P	Narrow Width

## Features

- 7,000-lb. maximum lifting capacity
- Wide drive-thru with tall lifting height and short runways
- Runways include rail-kit for optional accessories
- Electric / hydraulic power system
- Single hydraulic cylinder mounted underneath runway
- Internal anti-sway slider blocks in each column
- Oversized self-lubricating cable rollers
- Features heavy-duty 3/8" aircraft cable
- Rugged 1.25" roller axles
- Multi-position safety locks in each column
- Adjustable lock ladders
- Ramps feature non-skid surface
- Push-button pneumatic safety release
- Optional 4,500-lb. capacity rolling jack available

### Dependable design

Four heavy-duty stainless steel lifting cables and a single hydraulic cylinder mounted underneath the runway make this lift the most durable, maintenance-free lifting system on the market.

### Dual-hub cable sheaves

Reduce car lift stress and fatigue on the axles, sheaves and cables. We insist on using dual-hub cable sheaves because they ensure that we offer a safer, higher-quality product. With BendPak, total peace-of-mind comes standard with every lift.

### Multi-level locking positions


Each four-post lift is equipped with multiple locking positions for variable-height parking. A convenient push-button pneumatic safety lock control releases all four independent safety locks simultaneously.

Note: An air supply (minimum 30 psi / 3 CFM) is required for the safety-lock mechanisms to disengage. It is solely the responsibility of the end-user to provide, install and maintain the air supply.

\*Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult [www.autolift.org](http://www.autolift.org) for a complete list or contact BendPak via [contact@bendpak.com](mailto:contact@bendpak.com).

# Specifications

Model	HD-7P	HD-7W
Style	Wide Width / High Lift	Wide Width / High Lift
SKU#	5175510	5175120
Lifting Capacity	7,000 lbs. (3,175 kg)	7,000 lbs. (3,175 kg)
A - Min. Runway Height	4.5" (114 mm)	4.5" (114 mm)
B - Max. Rise	82" (2,083 mm)	82" (2,083 mm)
C - Max. Lifting Height	86.5" (2,197 mm)	86.5" (2,197 mm)
D - Overall Width	100.25" (2,546 mm)	110.25" (2,800 mm)
E - Outside Length	174" (4,420 mm)	174" (4,420 mm)
F - Overall Length	200" (5,080 mm)	200" (5,080 mm)
G - Height of Columns	100" (2,540 mm)	100" (2,540 mm)
H - Width Between Columns	90.25" (2,292 mm)	100.25" (2,555 mm)
I - Drive-Thru Clearance	76.5" (1,943 mm)	86.5" (2,197 mm)
J - Runway Width	19" (483 mm)	19" (483 mm)
K - Length of Runways	164" (4,166 mm)	164" (4,166 mm)
L - Width Between Runways	37.5" (952 mm)	37.5" (952 mm) - 44-3/8" (1,127 mm)
M - Runway Centerline	56.5" (1,435 mm)	56.5" (1,435 mm) - 63-3/8" (1,610 mm)
N - Outside Edge of Runways	75.5" (1,918 mm)	75.5" (1,918 mm) - 82-3/8" (2,092 mm)
Min Wheelbase @ Capacity	115" (2,921 mm)	115" (2,921 mm)
Min Wheelbase @ 75% Capacity	100" (2,540 mm)	100" (2,540 mm)
Min Wheelbase @ 50% Capacity	85" (2,159 mm)	85" (2,159 mm)
Min Wheelbase @ 25% Capacity	70" (1,778 mm)	70" (1,778 mm)
Time to Full Rise	35 sec	35 sec
Locking Positions	15	15
Lock Spacing	every 4" (102 mm)	every 4" (102 mm)
Motor	220 VAC / 60 Hz / 1 Ph	220 VAC / 60 Hz / 1 Ph

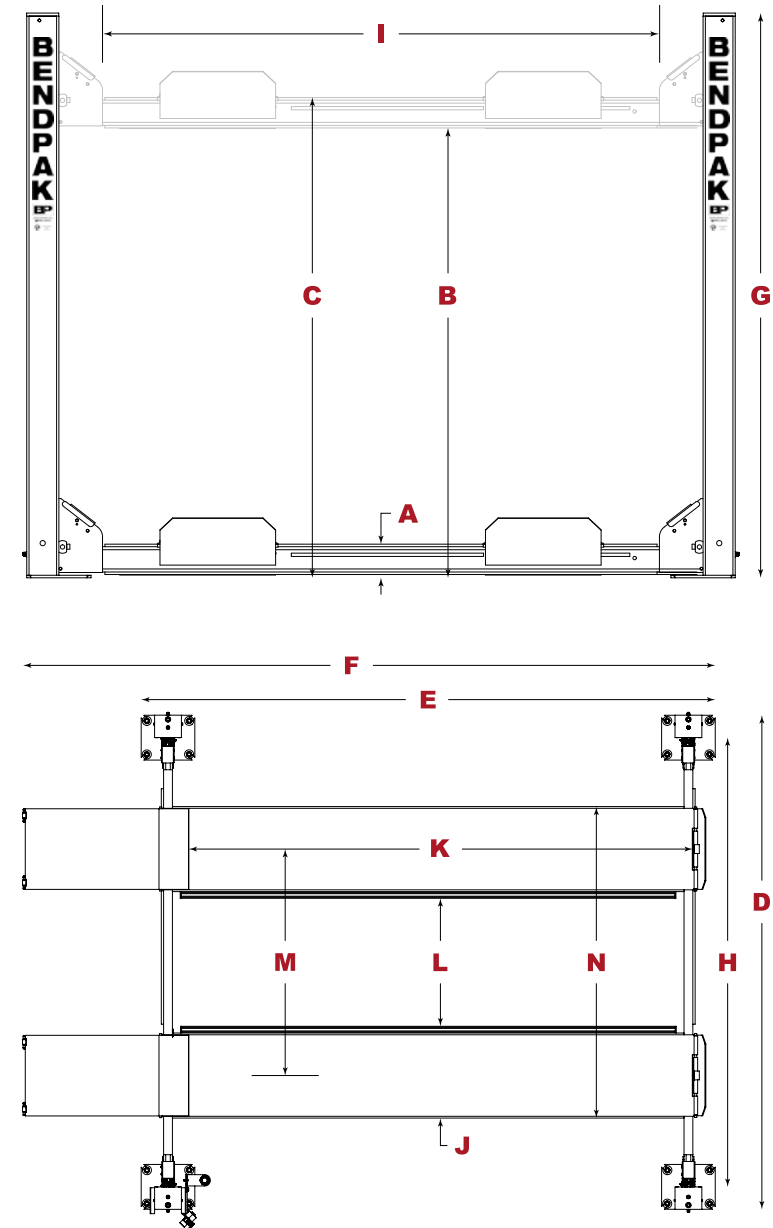

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult [www.autolift.org](http://www.autolift.org) for a complete list or contact BendPak via [contact@bendpak.com](mailto:contact@bendpak.com).