

XPR-10AXLS



Two-Post Lifts

SKU# 5175991

10,000-lb. Capacity, Asymmetric Clearfloor, Adjustable Width, Screw Pads, HIGH RISE / EXTRA TALL

Questions? Contact BendPak's Sales Team

sales@bendpak.com | 1-800-253-2363

Monday - Friday, 7AM to 4:30PM PST

The XPR-10AXLS Offers Extended Height PLUS 75" Lifting Height

Because taller mechanics are sometimes at a disadvantage while they work, we're making it easier to wrench under a fully raised vehicle. 10K [two-post lifts](#) don't offer taller lift carriages or get easier to work under than this. If you need maximum security and an extended working height that's ideal for taller individuals, you need the XPR-10AXLS. This particular two-post lift features an absolutely massive 75" cylinder stroke, which means we did more than just extend the columns for the sake of overhead clearance. We actually lift the bottom of the vehicle 6" higher than our standard 10K lift height. True safety in a car lift requires tall carriages; higher carriages eliminate balance issues that come into play when lifting trucks and SUVs.




This auto lift is truly something to get excited about. If your shop has the overhead clearance—at least 13'—the XPR-10AXLS might be the best lift you ever purchase. The big n' tall techs in your shop won't forget it!

Features

- 10,000-lb. lifting capacity
- Lift arms shown with optional foot guards
- Top beam accommodates wide or narrow configuration
- Double-telescoping screw pads offer increased versatility
- Padded overhead safety shutoff bar
- Single-piece columns
- Dual hydraulic direct-drive cylinders
- Oversized 59" tall carriage for superior strength
- Electric / hydraulic power system
- Large, 17" x 19" A36 steel base plate
- Self-lubricating dura-glide UHMW polyethylene bearings
- Single-point safety release
- Safety locks in each column spaced every 3"
- Automatic arm restraints
- Heavy-duty 1/2" aircraft-quality equalizer cables
- Oversized cable sheave diameter reduces cable fatigue
- 4-piece 63 mm stackable adapter set comes standard
- ALI certified

Specifications

Model	XPR-10AS	XPR-10AXLS
Style	Asymmetric	Asymmetric / High Rise
SKU#	5175393	5175991
Lifting Capacity	10,000 lbs. (4,536 kg)	10,000 lbs. (4,536 kg)
A - Rise	69" (1,753 mm)	75" (1,905 mm)
B - Rise + Pad Only	73" (1,854 mm)	79.75" (2,025 mm)
C - Max. Lifting Height	79" (2,007 mm)	82.25" (2,088 mm)
D - Min. Height + Pad	4" (102 mm)	4.75" (120 mm)
E - Height Overall (*)	145" (3,683 mm)	157" (3,983 mm)
F - Width Overall	137" (3,480 mm) or 145" (3,683 mm)	137" (3,480 mm) or 145" (3,684 mm)
G - Outside Columns	133.25" (3,386 mm) or 141.25" (3,590 mm)	133.25" (3,386 mm) or 141.25" (3,590 mm)
H - Inside Columns	106.25" (2,700 mm) or 114.25" (2,903 mm)	106.25" (2,700 mm) or 114.25" (2,903 mm)
I - Drive-Thru Clearance	93.75" (2,382 mm) or 101.75" (2,585 mm)	93.75" (2,382 mm) or 101.75" (2,585 mm)
J - Floor to Top Switch (*)	141" (3,581 mm)	147" (3,734 mm)
K - Front Arm Reach (MIN)	23.5" (595 mm)	23.5" (595 mm)
K - Front Arm Reach (MAX)	43.75" (1,110 mm)	43.75" (1,110 mm)
L - Rear Arm Reach (MIN)	40.25" (1,024 mm)	40.25" (1,024 mm)
L - Rear Arm Reach (MAX)	58" (1,474 mm)	58" (1,474 mm)
Screw Pad Adjustment	2" (51 mm)	2" (51 mm)
Max. Load per Arm	2,500 lbs. (1,134 kg)	2,500 lbs. (1,134 kg)
Time to Full Rise	45 seconds	50 seconds
Noise	45 dB	45 dB
Motor	220 VAC / 60 Hz / 1 Ph	220 VAC / 60 Hz / 1 Ph

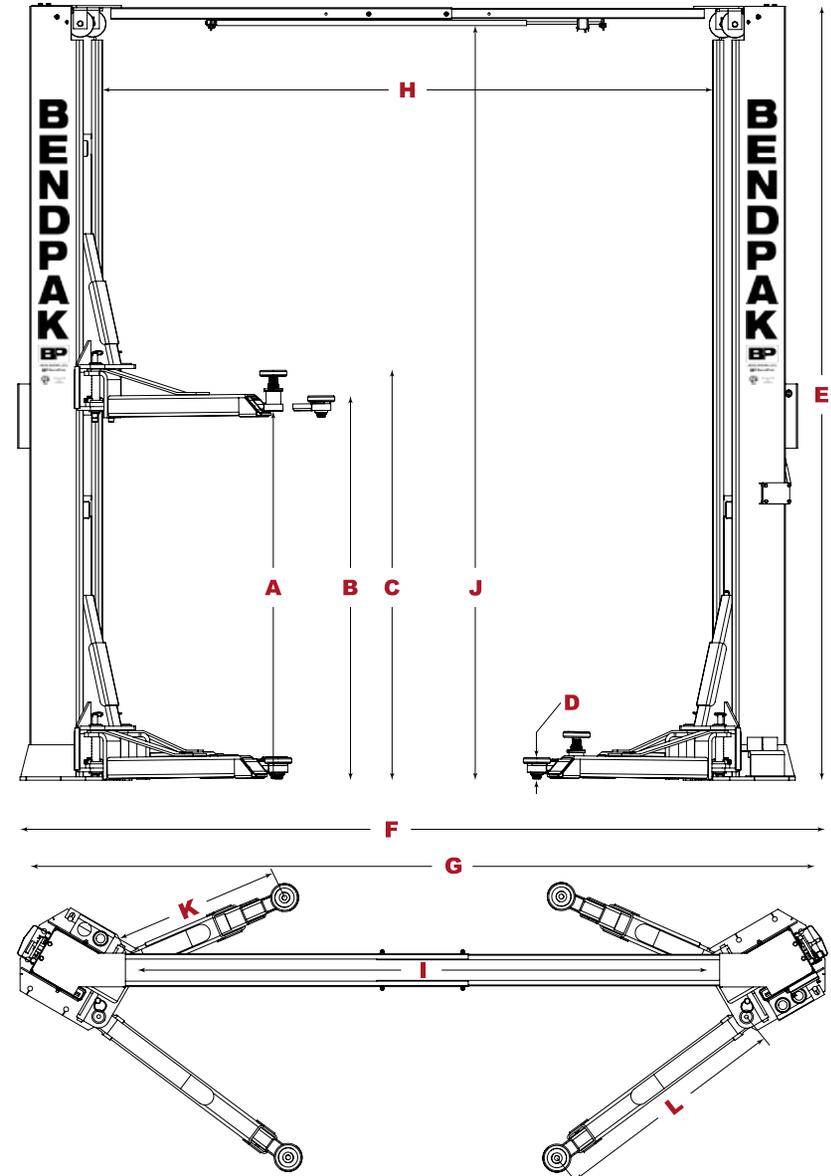

*Optional bolt-on top extension for columns raises the overall height and overhead safety bar an additional 24". Must be ordered from BendPak at time of order.

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult www.autolift.org for a complete list or contact BendPak via contact@bendpak.com.