

# XPR-10XLS



## Two-Post Lifts

SKU# 5175129

10,000-lb. Capacity, Clearfloor, Adjustable Width, HIGH RISE

Questions? Contact BendPak's Sales Team

sales@bendpak.com | 1-800-253-2363

Monday - Friday, 7AM to 4:30PM PST

## XPR-10XLS Symmetrical Lift Offers MORE Lifting Height

Tall techs no longer have to strain themselves while they work. The XPR-10XLS is a high-reach symmetrical two-post lift that can be customized with an optional extension kit and/or Low-Pro™ arms. Perfect for vehicles of all sizes. A must-have tool to help taller techs stand upright while they work.

## Options

SKU#	Model	Description
5175156	XPR-10XLS-LP	Low-Profile Arms
5175231	XPR-10XLS-181	181" Overall Height
5175194	XPR-10XLS-LP-181	181" OAH / Low-Profile

## Features

- Lift arms shown with optional foot guards
- 10,000-lb. lifting capacity
- Expandable top beam accommodates wide or narrow configuration
- Double-telescoping screw pads offer increased versatility
- Padded overhead safety shutoff bar
- Single-piece columns
- Dual hydraulic direct-drive cylinders
- Automatic arm restraints
- Lowered arm tube supports
- Maintenance-free UHMW load bearings
- Oversized 59" tall carriage for superior strength and durability
- Electric / hydraulic power system
- Large, 17" x 19" A36 steel base plate
- Self-lubricating dura-glide UHMW polyethylene bearing system
- Single-point safety release
- Safety locks in each column spaced every 3"
- Automatic overhead shutoff
- Plated arm restraints and arm pins for rust prevention
- Heavy-duty 1/2" aircraft-quality equalizer cables
- Oversized cable sheave diameter reduces cable fatigue
- 4-piece 63 mm stackable adapter set comes standard
- ALI Certified




With BendPak's 10,000-lb. capacity XPR-10XLS symmetrical two-post lift in your shop, most cars, trucks and SUVs will be raised quickly and effortlessly. Fully ALI Certified, this model features an extra-high lifting carriage. The taller carriage offers an extra 6" of lift, which means vehicles can be raised a full 75" (about 80" with adapters). Taller mechanics will enjoy this feature, since it means they no longer have to bend, stoop, strain and even injure themselves while they spend hour after hour working underneath lifted vehicles.

There's no car lift quite like the XPR-10XLS. This is the symmetrical version (an asymmetrical version is also available), and it's ideal for shops and operators that deal mainly with vehicles whose centers of gravity are toward the center of the car. Of course, trucks and SUVs can be used with this model as well. Some prefer asymmetrical lifts because they allow a little more door clearance, while other prefer vehicles to be positioned as close to the center of the lift as possible. There's no right or wrong—the choice is yours!

# Specifications

Model	XPR-10S	XPR-10XLS
Style	Symmetric	Symmetric / High Rise
SKU#	5175395	5175129
Lifting Capacity	10,000 lbs. (4,536 kg)	10,000 lbs. (4,536 kg)
A - Rise	69" (1,753 mm)	75" (1,905 mm)
B - Rise + Pad Only	73" (1,854 mm)	79.75" (2,026 mm)
C - Max. Lifting Height	79" (2,007 mm)	82.25" (2,089 mm)
D - Min. Height + Pad	4" (102 mm)	4.75" (121 mm)
E - Height Overall (*)	145" (3,683 mm)	157" (3,988 mm)
F - Width Overall	132" (3,353 mm) or 145" (3,683 mm)	132" (3,353 mm) or 145" (3,683 mm)
G - Outside Columns	126.75" (3,220 mm) or 139.75" (3,555 mm)	126.75" (3,219 mm) or 139.75" (3,550 mm)
H - Inside Columns	105.5" (2,680 mm) or 118.5" (3,010 mm)	105.5" (2,680 mm) or 118.5" (3,010 mm)
I - Drive-Thru Clearance	93" (2,362 mm) or 106" (2,692 mm)	93" (2,362 mm) or 106" (2,692 mm)
J - Floor to Top Switch (*)	141" (3,581 mm)	147" (3,734 mm)
K - Front Arm Reach (MIN)	27.5" (698 mm)	25.5" (648 mm)
K - Front Arm Reach (MAX)	51.5" (1,308 mm)	49.5" (1,257 mm)
L - Rear Arm Reach (MIN)	34" (863 mm)	32.25" (819 mm)
L - Rear Arm Reach (MAX)	54.5" (1,384 mm)	52.5" (1,334 mm)
Screw Pad Adjustment	2" (51 mm)	2" (51 mm)
Max. Load per Arm	2,500 lbs. (1,134 kg)	2,500 lbs. (1,134 kg)
Time to Full Rise	45 seconds	45 seconds
Noise	45 dB	45 dB
Motor	220 VAC / 60 Hz / 1 Ph	220 VAC / 60 Hz / 1 Ph

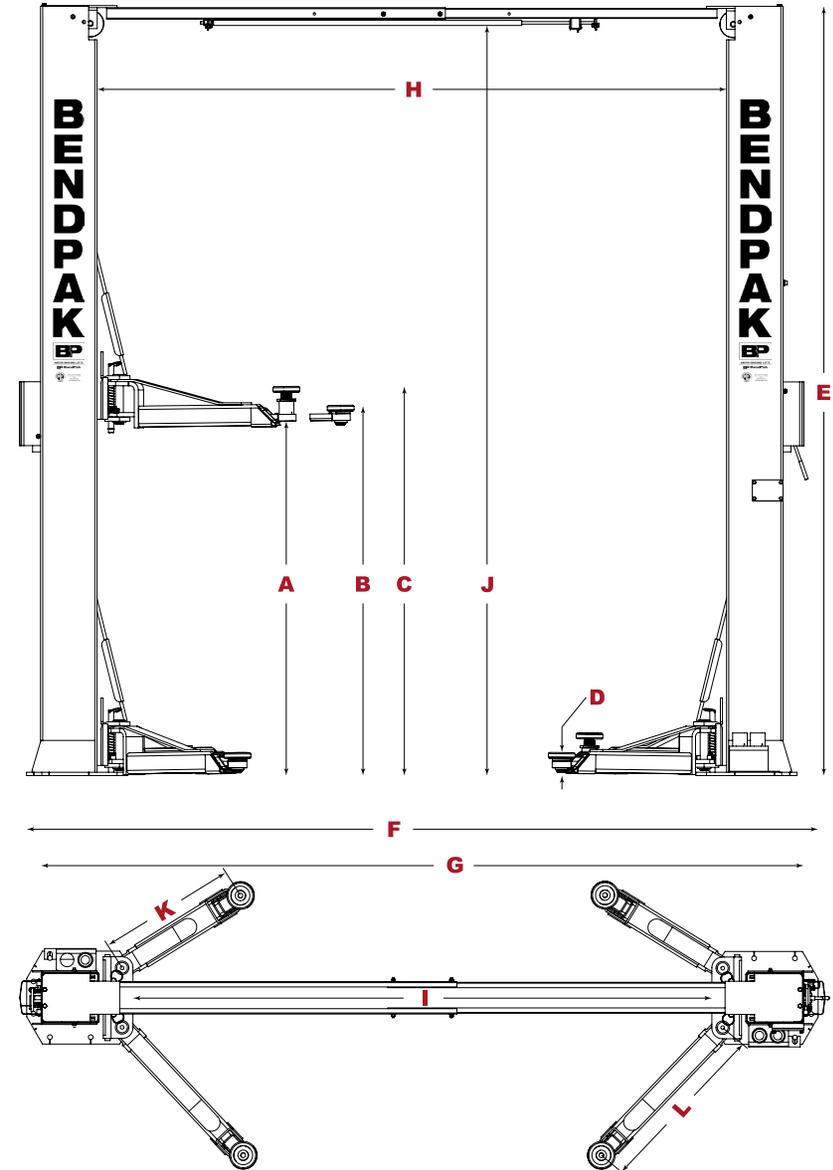

\*Optional bolt-on top extension for columns raises the overall height and overhead safety bar an additional 24". Must be ordered from BendPak at time of order.

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult [www.autolift.org](http://www.autolift.org) for a complete list or contact BendPak via [contact@bendpak.com](mailto:contact@bendpak.com).