

HD-9EWT

Four-Post Lifts

SKU# 5175607

9,000-lb. Capacity, Extra-Wide / High

THE ULTIMATE EXTRA-WIDE, HIGH-RISE LIFT

BendPak's HD-9EWT is the perfect solution for all your storage needs. This extra-tall and extra-wide lift offers ample overhead clearance and enough side room to easily park light-duty trucks, SUVs, and virtually any low ground-clearance vehicles. With over 6 inches of additional width compared to the HD-9XW, this lift is perfect for wide cars and off-road vehicles.

PREMIUM ENGINEERING FOR UNMATCHED DURABILITY

Dual-hub cable sheaves are more expensive to manufacture, but they prevent axles, sheaves, and cables from burning out prematurely. The HD-9EWT's multi-level locking positions ensure that technicians can lock the lift at varied heights, eliminating the need to crouch or reach uncomfortably. The electric-hydraulic power system allows you to stop, start, and reverse your four-post lift on a dime, with controls within easy reach.

Each four-post lift comes with four lifting cables made from superior-grade stainless steel, rated to handle 14,400 lbs. each. These cables are hidden within the post columns for safety and a streamlined look. The integrated design routes all lifting cables, airlines, safety latches, and sheaves internally, adding to the lift's sleek appearance.

ENHANCED SAFETY AND PERFORMANCE

Safety is a top priority with each and every BendPak lift. Four locks engage simultaneously as the lift is raised, and a backup locking system catches cable slack in the unlikely event of cable failure. Longer approach ramps and low runways make lifting sports cars and other low-standing vehicles easier than ever.



PERFECT FOR THE SHOP AND GARAGE

The HD-9EWT is a solid choice for both DIY enthusiasts as well as professional shop owners. The added ceiling clearance is particularly valued in shops, providing ample space for lower-ceiling vehicles. For anyone looking to solve their vehicle storage problems while maximizing their space, the HD-9EWT is the perfect solution.

FEATURES

- 9,000 lb. Capacity
- Freestanding Design
- Adjustable Safety Locks in Each Column
- Push-Button Pneumatic Safety Release
- Internal Anti-Sway Slider Blocks in Each Column
- Independent Backup Slack-Cable Safety Latches
- Better Suited for Wide Cars and Off-Road Vehicles

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult www.autolift.org for a complete list or contact BendPak via contact@bendpak.com.

1-800-253-2363 • sales@bendpak.com
30440 Agoura Road Agoura Hills, CA 91301 USA



BendPak

HD-9EWT



Four-Post Lifts

SKU# 5175607
9,000-lb. Capacity, Extra-Wide / High

SPECIFICATIONS

| | |
|---|--|
| Lifting Capacity | 9,000 lbs. / 4,082 kg |
| Maximum Capacity – Front Axle | 4,500 / 2,041 kg |
| Maximum Capacity – Rear Axle | 4,500 / 2,041 kg |
| A Min. Runway Height | 4.75 in. / 121 mm |
| B Maximum Rise | 82.165 in. / 2,087 mm |
| C Maximum Lifting Height | 87 in. / 2,208 mm |
| D Overall Width ±.125 in. / 3 mm | 117 in. / 2,970 mm |
| E Outside Length | 198 in. / 5,028 mm |
| F Overall Length | 224.5 in. / 5,703 mm |
| G Height of Post | 100 in. / 2,537 mm |
| H Distance Between Posts | 107 in. / 2,716 mm |
| I Drive-thru Clearance | 93.25 in. / 2,371 mm |
| J Runway Width | 19 in. / 482 mm |
| K Runway Length | 182.25 in. / 4,629 mm |
| L Width Between Runways | 35.75 in. - 42 in. / 910 mm - 1,068 mm |
| M Runway Centerline | 57.75 in. - 64 in. / 1,468 mm - 1,626 mm |
| N Outside Edge of runway | 76.75 in. - 83 in. / 1,950 mm - 2,108 mm |
| Max. Load Operating Pressure | 2,460 psi |
| Min. Wheelbase @ Rated Cap. ¹ | 135 in. / 3,429 mm |
| Min. Wheelbase @ 75 Capacity ¹ | 115 in. / 2,921 mm |
| Min. Wheelbase @ 50 Capacity ¹ | 95 in. / 2,413 mm |
| Min. Wheelbase @ 25 Capacity ¹ | 80 in. / 2,032 mm |
| Locking Positions | 17 spaced every 4 in. / 102 mm |
| Motor ² | 220VAC, 60 Hz, 1 Ph |

Specifications subject to change without notice.

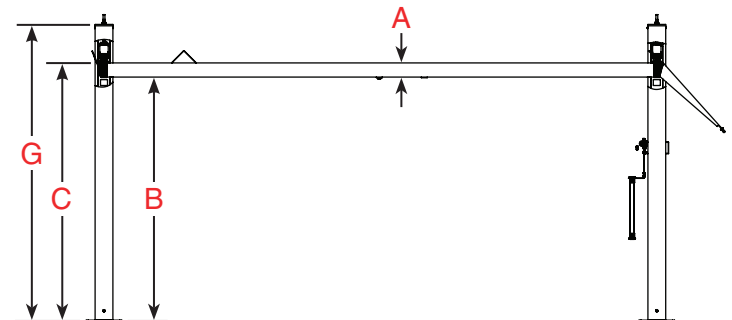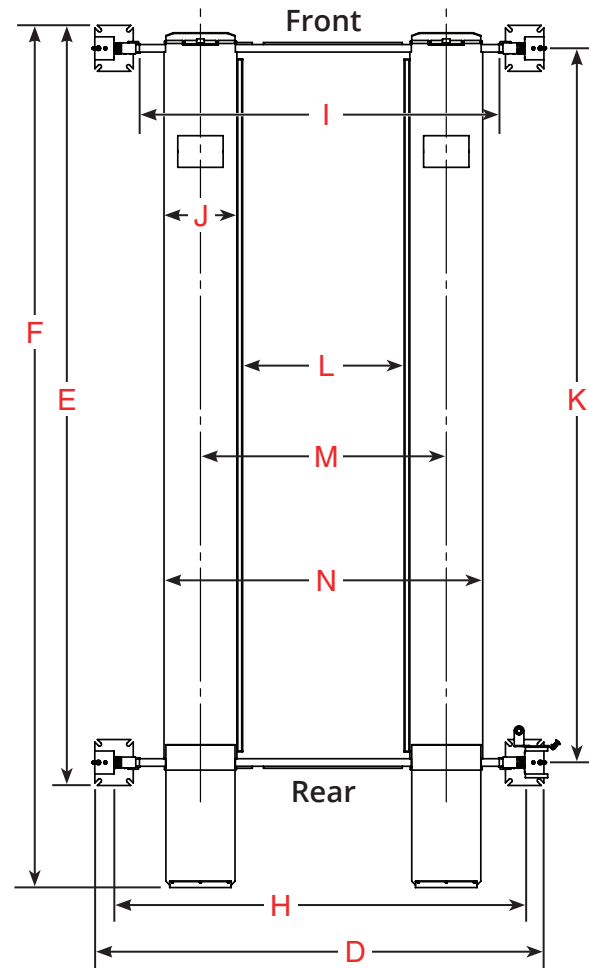

¹ The Lift supports less weight than its rated capacity if the Vehicle's wheelbase is shorter; this is because the wheels are closer to the middle of the Runways, where there is less support. For example, the maximum weight allowed on the Lift for a Vehicle with a wheelbase of 85 in. is 50 percent of the Lift's rated capacity (or 4,500 lbs. when the rated capacity is 9,000 lbs.).

² Special voltages available upon request.

1-800-253-2363 • sales@bendpak.com
30440 Agoura Road Agoura Hills, CA 91301 USA



BendPak