PCL-18B-2

Mobile Column Lifts

36,000-lb. Capacity / Mobile Column Lift System / SET OF 2

Set of 2 Mobile Column Lifts

With a pair (2) of <u>mobile column lifts</u>, you can add to your existing fleet and expand your lifting capabilities to include larger semi-trucks and heavy-duty vehicles. A minimum of 4 mobile column lifts must be used to lift a vehicle, and heavier vehicles require 6 or 8. This 2-set is a great way to gradually upgrade into the 6 or 8-lift range, offering up to 144,000 lbs. with a full set.

Mobile Column Lift Series

LOW VOLTAGE - 208-230/190V, 50/60HZ, 3-Ph

| SKU# | Model | Description |
|---------|-----------|--------------------------------|
| 5175291 | PCL-18B-2 | 36,000-lb Capacity / SET OF 2 |
| 5175292 | PCL-18B-4 | 72,000-lb Capacity / SET OF 4 |
| 5175293 | PCL-18B-6 | 108,000-lb Capacity / SET OF 6 |
| 5175294 | PCL-18B-8 | 144,000-lb Capacity / SET OF 8 |

HIGH VOLTAGE - 460/380V, 50/60HZ, 3-Ph

| SKU# | Model | Description |
|---------|-----------|--------------------------------|
| 5175295 | PCL-18B-2 | 36,000-lb Capacity / SET OF 2 |
| 5175296 | PCL-18B-4 | 72,000-lb Capacity / SET OF 4 |
| 5175297 | PCL-18B-6 | 108,000-lb Capacity / SET OF 6 |
| 5175298 | PCL-18B-8 | 144,000-lb Capacity / SET OF 8 |

Features

- 18,000-lb. individual column capacity / 144,000-lb. maximum system capacity
- Meets or exceeds the standards prescribed by ANSI/ALI ALCTV-2017
- Just three 30' cables are used leaving the front or back of the lift clear of cable obstructions
- Intuitive controls allow the lift to be fully programmed and controlled from any column
- Smart electronics feature self-diagnostics and selfcalibration functions
- Sealed and enclosed linear potentiometers feature precision potentiometric output and high-frequency response for precise synchronization and communication of all columns through all cycles for precise, level lifting
- Height settings can be programmed for low ceiling shops



Questions? Contact BendPak's Sales Team

sales@bendpak.com | 1-800-253-2363 Monday - Friday, 7AM to 4:30PM PST



Shown in Set of 4













Specifications

Each Column

| Model | PCL-18B |
|-------------------------------------|------------------------|
| Lifting Capacity | 18,000 lbs. (8,165 kg) |
| A - Overall Height (RAISED) | 101" (2,565 mm) |
| B - Overall Height (LOWERED) | 146.5" (3,721 mm) |
| C - Max. Lifting Height | 71.5" (1,889 mm) |
| D - Overall Depth | 48.75" (1,238 mm) |
| E - Overall Width | 45" (1,143 mm) |
| F - Chassis Length | 32.25" (819 mm) |
| G - Min. Lifting Fork Width | 9.5" (241 mm) |
| H - Max. Lifting Fork Width | 35" (889 mm) |
| I - Lifting Fork Length | 11.5" (292 mm) |
| Turning Circle | 40" (1,016 mm) |
| Column Weight | 1,450 lbs. (657 kg) |
| Lifting Speed | 85 sec |
| Shipping Weight | 1,450 lbs. (657 kg) |

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult www.autolift.org for a complete list or contact BendPak via contact@bendpak.com.

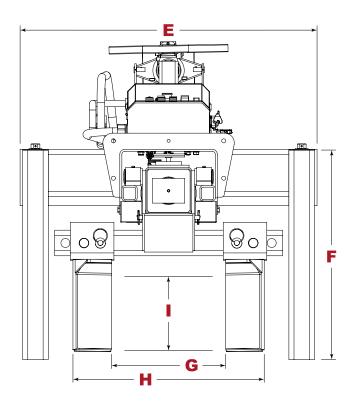

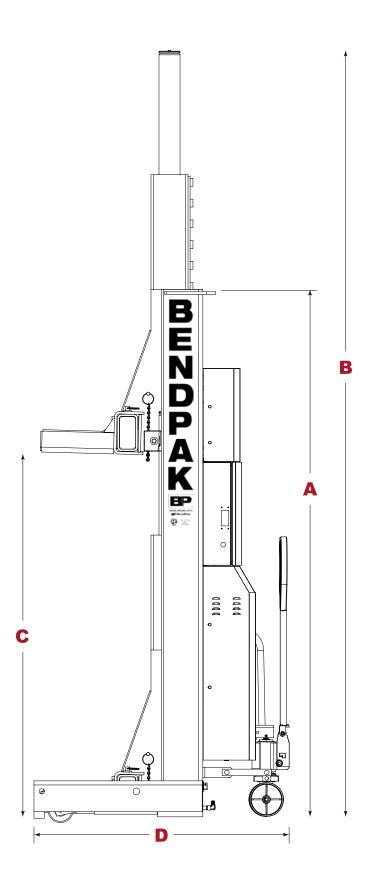

BendPak.

BP